


Elara® Technical Specifications for 6032 (Low Profile)

Letter	Description	SOAKING	PURE AIR® BATH	WHIRLPOOL	Each component requires a separate, dedicated GFCI protected circuit		
-	Drain/Blower/Motor Location	LH/RH Drain	LH/RH Drain/Right or Left Side Blower	LH/RH Drain/Right or Left Side Motor			
-	Drop-in Cutout Dimensions (L x W)	59" x 31" (1499 mm x 787 mm)			Model with components	GFCI Outlet (60Hz)	
-	Total Weight	911 lbs (413 kg)	932 lbs (423 kg)	944 lbs (428 kg)	SOAKING	Soaker only	None
-	Floor Loading	68 lb/ft ² (334 kg/m ²)	70 lb/ft ² (341 kg/m ²)	71 lb/ft ² (346 kg/m ²)		Soaker w/ Chromatherapy	120V/15A
-	Product Weight	74 lbs (34 kg)	95 lbs (43 kg)	107 lbs (49 kg)	PURE AIR® BATH	Blower	120V/15A
-	Operating Gallons (Max)	70 Gal (265 L)				Chromatherapy (if available)	120V/15A
-	Soaking Depth	15.2" (386 mm)			WHIRLPOOL	Motor/Pump	120V/20A
L	Outer Length	60" (1524 mm)				Heater (if available*)	120V/15A
W	Outer Width	32" (813 mm)			*Heater circuit not required on units equipped with Whisper+ Technology™.		
H	Overall Height	19.5" (495 mm)					
A	Overflow Height	15.5" (394 mm)					
B	Long Edge to Drain Center	9" (229 mm)					
C	Short Edge to Drain Center	16" (406 mm)					
D	Drain Shoe Length	7.5" (191 mm)					
E	Deck Height	0.63" (16 mm)					
F	Deck Width	3.6" (91 mm)					
G	Service Access Dimensions	12" x 18" (305 mm x 457 mm)					
I	Floor Cutout for Drain	12" x 6" (305 mm x 152 mm)					
J	Interior Dimensions (bottom of bath) L x W	45" x 23" (1143 mm x 584 mm)					

KEY DIMENSIONS* [NOTE: The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).]

*Right hand model shown. Left hand model is exact opposite.

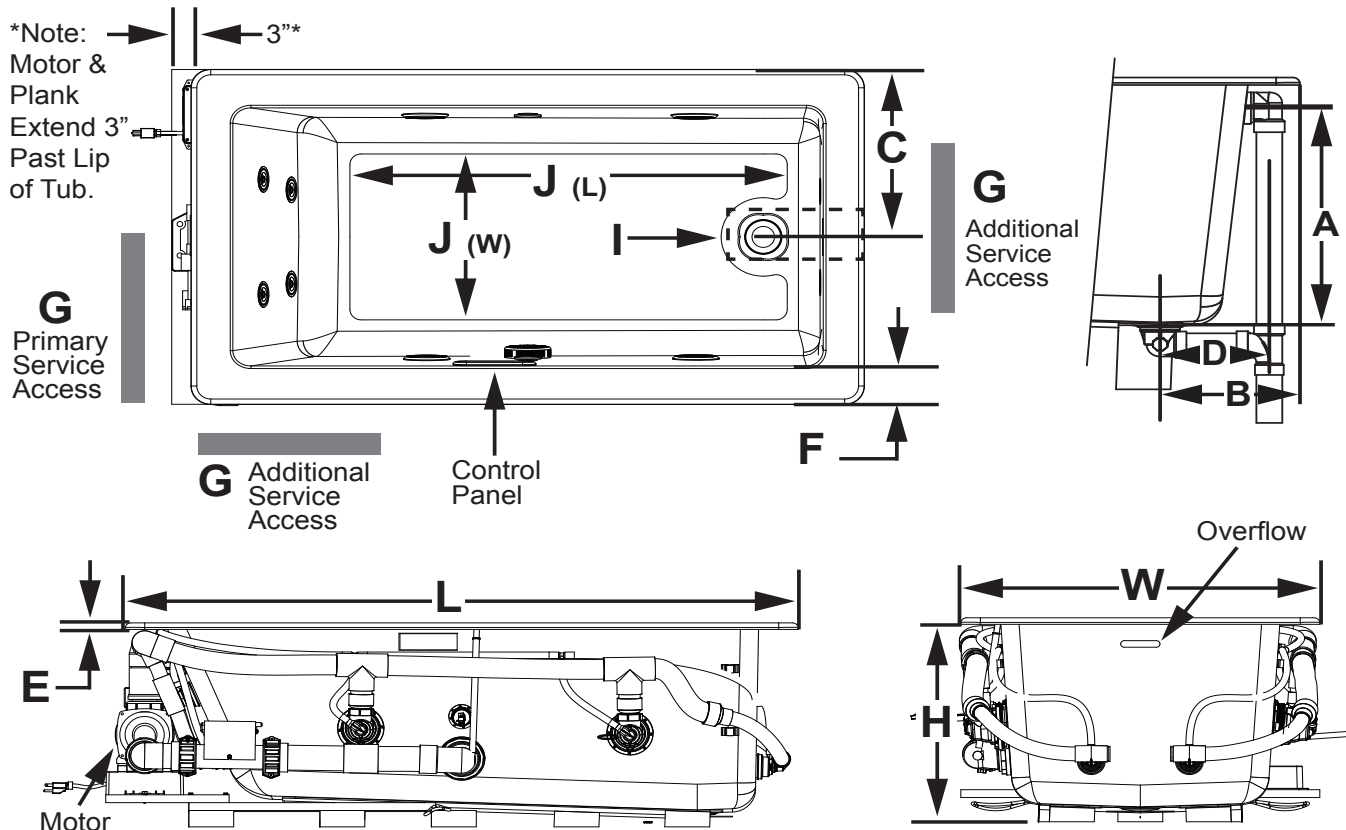

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE