


Abri™ 6036 Whirlpool And Soaking Bathtubs


Letter	Description	Whirlpool	Soaking
-	Drain Location	Left Hand / Right Hand	Left Hand / Right Hand
-	Whirlpool Pump Location	Opposite drain of drain location	N/A
-	Cutout	58.0" x 34.0" (1473 mm x 864 mm)	58.0" x 34.0" (1473 mm x 864 mm)
-	Total Weight	903 lb (410 kg)	869 lb (395 kg)
-	Floor Loading	60 lb/ft ² (293 kg/m ²)	58 lb/ft ² (186 kg/m ²)
-	Operating Gallons (Min/Max)	47 Gal (178L) / 67 Gal (254L)	47 Gal (178L) / 67 Gal (254L)
-	Product Weight	95 lb (43 kg)	61 lb (28 kg)
L	Outer Length	60.00" (1524 mm)	60.00" (1524 mm)
W	Outer Width	36.00" (914 mm)	36.00" (914 mm)
H	Overall Height	21.25" (540 mm)	21.25" (540 mm)
A	Overflow Height	17.50" (445 mm)	17.50" (445 mm)
B	Long Edge to Drain Center	9.00" (229 mm)	9.00" (229 mm)
C	Short Edge to Drain Center	18.00" (457 mm)	18.00" (457 mm)
D	Drain Shoe Length	7.50" (191 mm)	7.50" (191 mm)
E	Deck Height	2.00" (51mm)	2.00" (51mm)
F	Deck Width	1.25" (32 mm)	1.25" (32 mm)
G	Service Access	12.00 x 18.00" (305 x 457 mm)	N/A
I	Floor Cutout for Drain	12.00 x 4.00" (305 x 102 mm)	12.00 x 4.00" (305 x 102 mm)
J	Interior Dimensions: J(W) x J(L)	22.00 x 41.50" (559 x 1059 mm)	22.00 x 41.50" (559 x 1059 mm)

NOTE


The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).
 Electrical Specifications
 (Each component requires a separate, dedicated GFCI protected circuit)
 Motor/Pump 120V 15A 60HZ
 Heater (optional) 120V 15A 60HZ

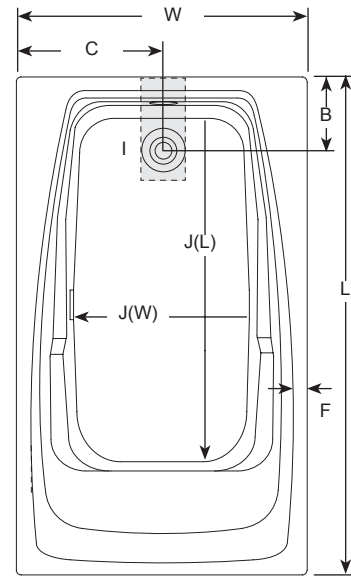

Key Dimensions

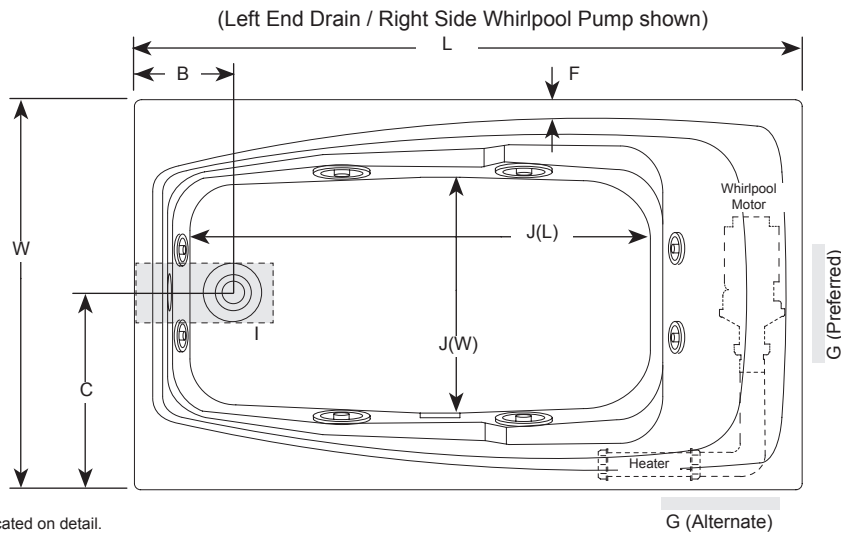

*Deck width reflects only area indicated on detail.

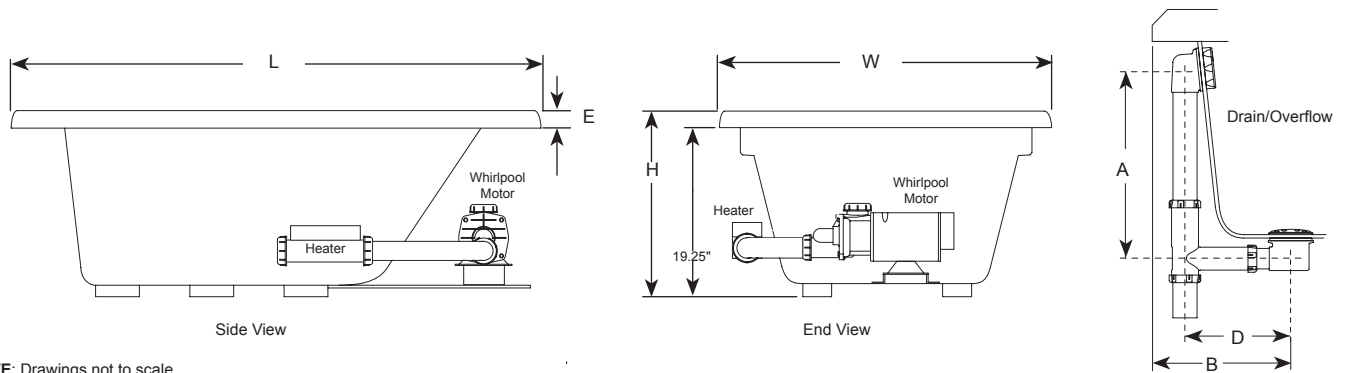

NOTE: Drawings not to scale.