

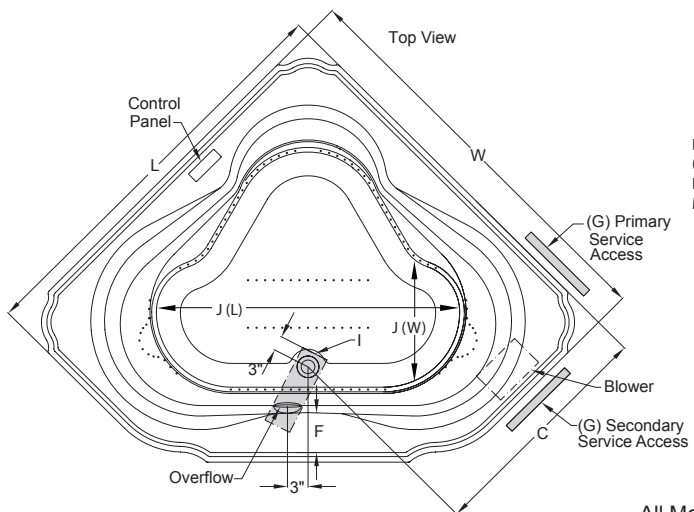
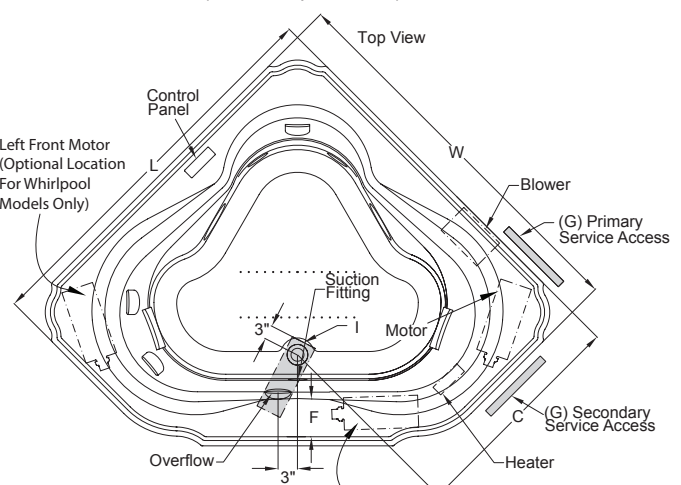
**Marineo™ - Technical Specifications for 6060 Models**

Letter	Description	SOAKING	PURE AIR® BATH	WHIRLPOOL	SALON® SPA	Each component requires a separate, dedicated GFCI protected circuit	
-	Drain/Motor Location	Center Drain/Right Side Motor And/Or Blower					
-	Cutout Template	Template Provided P/N P654000					
-	Total Weight	1146 lbs (520 kg)	1221 lbs (554 kg)	1226 lbs (556 kg)	1256 lbs (570 kg)		
-	Floor Loading	46 lb/ft <sup>2</sup> (224 kg/m <sup>2</sup> )	49 lb/ft <sup>2</sup> (238 kg/m <sup>2</sup> )	49 lb/ft <sup>2</sup> (239 kg/m <sup>2</sup> )	50 lb/ft <sup>2</sup> (245 kg/m <sup>2</sup> )		
-	Operating Gallons (Max)	92.0 gallons (348.2 liters)					
-	Product Weight	80 lbs (36 kg)	155 lbs (70 kg)	160 lbs (73 kg)	190 lbs (86 kg)		
-	Soaking Depth	17.3" (438.15 mm)					
L	Outer Length	60" (1524 mm)					
W	Outer Width	60" (1524 mm)					
H	Overall Height	25" (635 mm)					
A	Overflow Height	18.5" (470 mm)					
B	Long Edge to Drain Center	14" (356 mm)					
C	Short Edge to Drain Center	34.5" (876 mm)					
D	Drain Shoe Length	7.5" (191 mm)					
E	Deck Height	2" (51 mm)					
F	Deck Width	6" (152 mm)					
G	Service Access Dimensions	12" x 18" (305 mm x 457 mm)					
I	Floor Cutout for Drain	12" x 6" (305 mm x 152 mm)					
J	Interior Dimensions (bottom of bath) L x W	44" x 36" (1118 mm x 914 mm)					


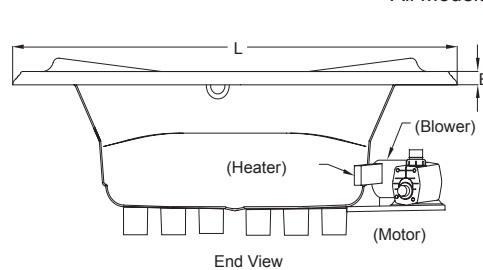
  

Model with components		GFCI Outlet (60Hz)
SOAKING	Soaker only	None
	Soaker w/ Chromotherapy	
PURE AIR® BATH	Blower	120V 15A
	Chromotherapy (if available)	
WHIRLPOOL	Motor/Pump	120V 20A
	Heater (if available)	120V 15A
SALON® SPA	Motor/Pump/Heater	240V 20A
	Blower	120V 15A

**KEY DIMENSIONS\* [NOTE: The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).]**

 Marineo™ Soaking And Pure Air® Bath Models  
 (Pure Air® Bath Shown)

 Marineo™ Whirlpool And Salon® Spa Models  
 (Salon® Spa Shown)


All Models



Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE