

Jacuzzi® Exposed Roller Bathtub & Shower Doors

Letter	Description	60" x 59" Bathtub Door	48" x 79" Shower Door	60" x 79" Shower Door	Key Features
-	Opening Method	Single Bypass Sliding	Single Bypass Sliding	Single Bypass Sliding	Semi-Frameless Construction with Durable Safety Tempered Glass Smartguard™ Glass Coating for Easy Cleaning Generous Three Point Out-of-Plumb Adjustability Simplifies Installation in Existing Alcoves Anodized Aluminum Material and Stainless Steel Hardware Deliver Lasting Quality
-	Glass Thickness	5/16" (8 mm)			
-	Installation Type	Alcove			
-	Installation Position Options	Left or Right Hand (see manual for instructions)			
-	Product Weight	100 lbs (45.4 kg)	120 lbs (54.4 kg)	150 lbs (68.0 kg)	
A	Product Height	59" (1,500 mm)	79" (2,007 mm)	79" (2,007 mm)	Available Finishes Polished Chrome Brushed Nickel
B1	Maximum Wall Opening	59.17" (1,503 mm)	47.05" (1,195 mm)	59.17" (1,503 mm)	
B2	Minimum Wall Opening	57.99" (1,473 mm)	45.87" (1,165 mm)	57.99" (1,473 mm)	
-	Out-of-Plumb Adjustability	0.59" (15 mm) on each side - 1.18" Total			
-	Out-of-Plumb Adjustment Point(s)	Rollers, Wall Jamb, Expanders			
C/D	Fixed Panel Dim. (LxH)	26.9" x 59.0" (684 mm x 1,500 mm)	20.9" x 79.0" (532 mm x 2,007 mm)	26.9" x 79.0" (684 mm x 2,007 mm)	
E/F	Sliding Panel Dim. (LxH)	28.9" x 58.6" (733 mm x 1,488 mm)	22.9" x 78.5" (581 mm x 1,995 mm)	28.9" x 78.5" (733 mm x 1,995 mm)	
G	Door Opening Length	24.6-25.6" (625-640 mm)	18.5-19.6" (470-498 mm)	24.6-25.6" (625-640 mm)	
H	Door Opening Height	55.3" (1,406 mm)	75.3" (1,914 mm)	75.3" (1,914 mm)	
I	Overall Width	2.5" (64 mm)			
-	Threshold Width Required	2.25" (57 mm)			
J	Door Handle Height	22.25" (565 mm)	32.50" (826 mm)		


Note: Nominal door sizes correspond to matching pan dimensions, as shower wall material decreases alcove length.

KEY DIMENSIONS

Note: Drawings not to scale.



Top View

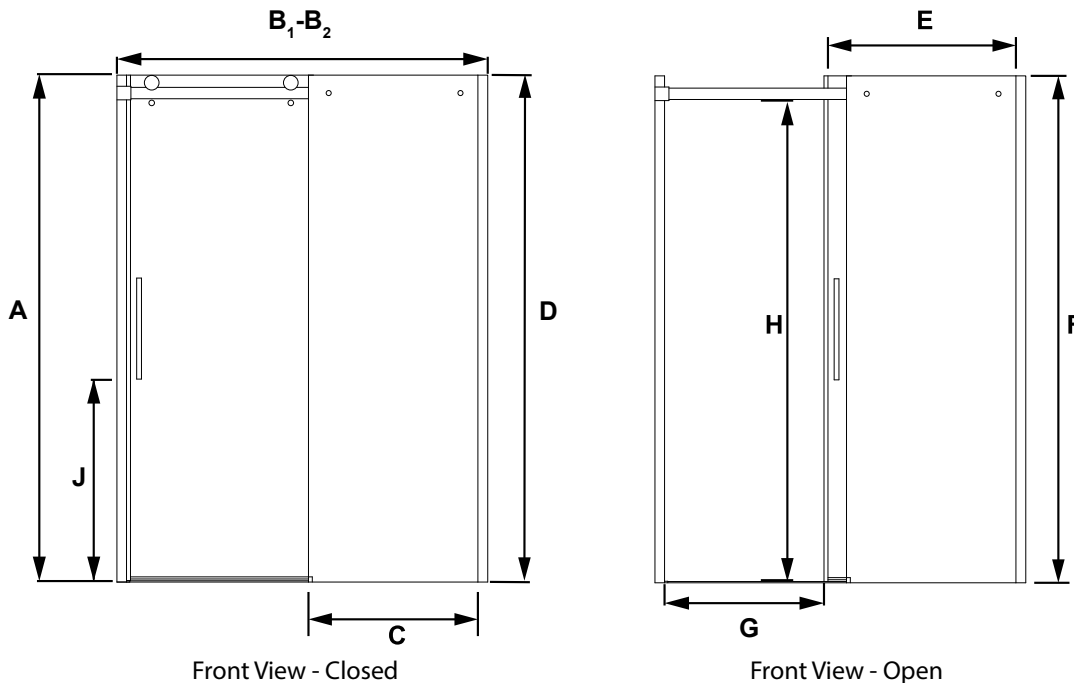

Front View - Closed

Front View - Open

©2019 Jacuzzi Inc. • For additional information, call Customer Service 800-288-4002 • www.jacuzzi.com/baths
 Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE