



READ INSTRUCTIONS FIRST

BEFORE YOU BEGIN...

If you are installing your lavatory in a new or remodeled bathroom, you should make sure that you are in compliance with all local plumbing codes.


The rough-in information shown on the back will be helpful in placing the lavatory, water supply piping, shut-off valves and drain in their proper positions.

TOOLS AND MATERIALS

You can determine which tools and materials are necessary by reading the complete installation instructions and examining the job you have to do.

This is a list of tools that may be needed:

sponge
 basin or pail
 tape measure
 flat blade screwdriver
 emery cloth
 hammer and nails
 saber saw or keyhole saw
 drill
 chisel
 cardboard, newspapers or a dropcloth

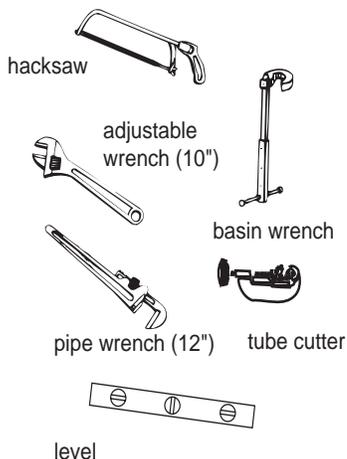

These are optional, in case existing materials are unusable:

two shut-off valves with 1/2" I.P.S. outlet, optional (check house piping to determine valve inlet dimension.)

1/2" I.P.S. hot and cold water supply tubes with compression nut and ferrule

drain tail pipe, trap and additional drain pipe as required

2" x 4" board

REMOVING YOUR OLD LAVATORY

1. Turn off the water supply. This is done by closing the two shut-off valves located under the lavatory.

If there are no shut-off valves leading to the lavatory, you must turn off the water at the main valve. This is usually located in the basement, garage or near the foundation on the outside of the house. It may also be near the water meter.

Check to be sure the water is off by turning on the faucet where you are working until the water stops flowing.

If you have shut off the main valve in a two-story house or greater, you should open the kitchen faucet and another faucet on the same level. Water will then drain from the entire line. This will help avoid spills. Be sure and close the faucets before you turn on the main valve again.

2. Disconnect the drain pipes. Take off as many sections as possible between the lavatory and the wall or floor to facilitate removal. Place a basin under the work area to catch any water that may still be in the drain.

3. Before removing anything else, check to see if the pipes in the wall are providing support for the lavatory. If this is the case, use care in removing the faucet connections. The lavatory may fall once the faucet is disconnected, so have a helper hold it up while you work.

Detach the faucet from the shut-off valves by unscrewing the compression nut at the joints between the valves and the water supply tubes.

If the connection is corroded you may need to cut off the nut with a hacksaw. If there is no nut or shut-off valve, use a tube cutter or hacksaw to separate the faucet from the water supply tubes.

Keep the basin and sponge handy for water that remains in the pipe and faucet.

4. Determine how the lavatory is mounted. Especially notice if there is a good structural support for wall mounting. See step 5 for bracing instructions, if required.

If there is a wall bracket at the back, you might be able to lift the lavatory off. It may be heavy, so have a helper lend a hand. A floor mounted lavatory can be removed by lifting it off of the pedestal or legs after first detaching any wall-mount fittings.

INSTALLING YOUR NEW PEDESTAL LAVATORY

1. If you are installing the lavatory in a new or substantially remodeled bathroom, refer to the rough-in drawing (on the back of this page) for locations of shut-off valves and drain. The inlets of the shut-off valves should match the size of the piping in the house and the outlets should match the water supply tubes you will run to the faucet. The latter are usually 1/2" I.P.S. tubing.

You should also install shut-off valves if there were none in the existing bathroom or if the old ones are unserviceable or unsightly.

A cross brace is required to provide a solid mounting support for the new lavatory. Check to be sure there is one in the existing bathroom. If not, use a saw and chisel to mortise a 2" x 4" board across at least three of the vertical 2" x 4" wall studs as shown in figure 1. Nail it securely into place.

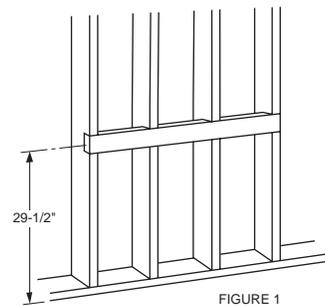


FIGURE 1

The center of this cross brace should be about 29-1/2" up from the floor.

Solid masonry walls do not require a cross brace since the wall should hold the expansion anchor plugs provided with your lavatory.

2. The pedestal lavatory should be centered on the two shut-off valves. Locate and mark the centerline on the floor. Temporarily center the pedestal base with the back edge approximately 8" to 10" from the finished wall. Gently place the skirt onto the top of the pedestal.

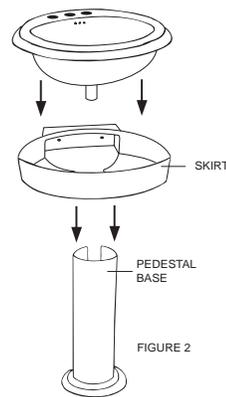


FIGURE 2

3. Gently slide the pedestal and skirt toward the wall until the back mounting surface of the skirt is flush against the wall and the pedestal is flat on the floor. Adjust the pedestal so that the anchoring hole aligns with the centerline drawn on the floor.

4. Check that the skirt is flush against the wall and trace through the mounting holes at the back of the skirt and onto the wall. Also trace through the pedestal anchoring hole and onto the floor.

5. Carefully remove the skirt and pedestal from area. Mark the center of the traced holes on the wall and floor for drilling and installation of hanger bolts and pedestal anchoring screw.

6. For installation onto wood support, drill two 3/16" diameter holes, 1-1/2" deep for insertion of the two hanger bolts. For installation onto masonry type walls, drill two 1/2" diameter holes, 2-3/8" deep. Hanger bolts should protrude approximately 2". Drill a hole for pedestal anchoring screw (not provided).

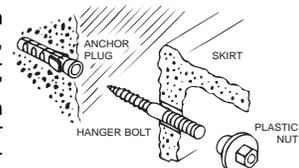


FIGURE 3

7. Position the pedestal and skirt as in step #2 and carefully slide the unit, guiding the hanger bolts through the holes in the back of the skirt, until the skirt is flush against the wall and the pedestal base is flat on the floor and aligned with the centerline. Hand tighten the plastic nuts onto the hanger bolts. **DO NOT OVERTIGHTEN.**

8. When all surfaces are properly aligned, leveled and adjusted for best fit, tighten the nuts on the hanger bolts and install the pedestal anchoring screw. **DO NOT OVERTIGHTEN.**

9. Install the faucet fittings and waste assembly onto the lavatory. **NOTE: An offset clevis strap has been included with your new lavatory. This will simplify installation of the pop-up waste when installed as shown. See Figure 4.**

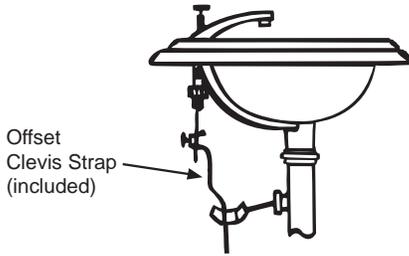


FIGURE 4

The lavatory should be checked for fit before the next step of applying caulking. Carefully lift and place the lavatory onto the skirt. Note that the lavatory will overhang the skirt slightly. Adjust for even fit. Gently remove the lavatory.

10. Place a bead of caulking around the top of edge of the skirt. Lift the lavatory over the skirt and lower it onto the bead of caulking. Adjust the lavatory for an even fit in regard to the overhang.

11. Complete all supply and waste connections, following the instructions from the manufacture. Wipe all excess caulking from the lavatory and skirt.

12 Turn on the main water supply then open the shut-off valves. Check all connections for leaks. A slight tightening of about 1/4 turn will normally stop any leaks.

CARE AND CLEANING


For every day cleaning, use dish washing soap and water.

PARTS

Parts Policy...In order to avoid unnecessary delay or uncertainty in the satisfaction of warranty claims, buyers are advised to return alleged defective parts to the place of purchase. Sellers are authorized to address and resolve all warranty claims on fixtures directly with buyers.

Your limited warranty is packed in with your lavatory.

ROUGH-IN INFORMATION

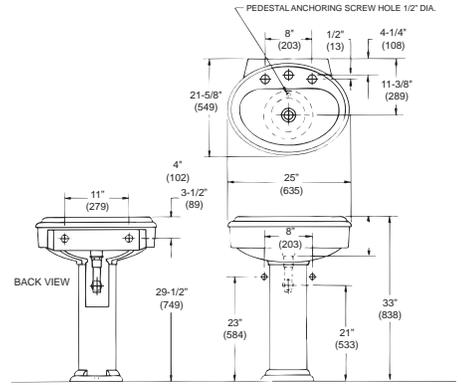

NOTE: Dimensions for supplies and trap are suggested.

FAUCETS ARE NOT INCLUDED. ALL FIXTURE DIMENSIONS ARE NOMINAL AND MAY VARY WITHIN THE RANGE OF TOLERANCES ESTABLISHED BY ANSI STANDARDS A112.19.4 ALL MEASUREMENTS SHOWN ARE SUBJECT TO CHANGE OR CANCELLATION



Decorative Countertop Lavatory

Installation Instructions

Refer to the sections **BEFORE YOU BEGIN, TOOLS AND MATERIALS** and **REMOVING YOUR OLD LAVATORY** on the opposite page before installing your new lavatory.

1. A template has been provided to allow you to make an accurate opening for your lavatory. Locate and draw a line at the centerline of the opening. Cut out the template with a scissors and trace onto the countertop using the centerline as a guide.

2. Drill a starter hole in the line you have drawn that is large enough to take the blade of a key hole or saber saw. Carefully saw along the line. See figure 1.

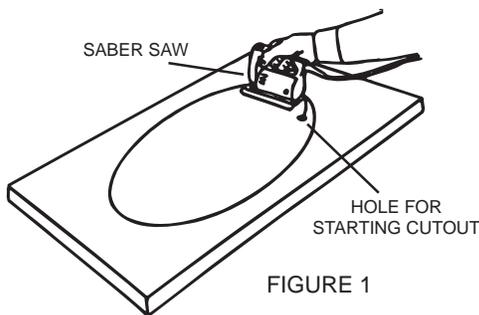


FIGURE 1

3. Install the faucet fittings and waste assembly onto the lavatory according to the manufacturer's instructions. **NOTE: An offset clevis strap has been included with your new lavatory. This will simplify installation of the pop-up waste when installed as shown. See figure 2.**

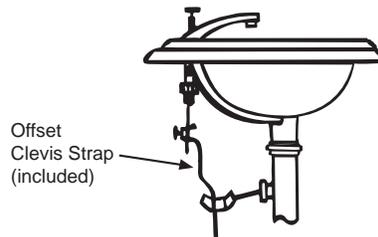


FIGURE 2

4. Clean the countertop surface around the cutout with a damp cloth. Apply a continuous bead of sealant (included) to the surface around the cutout.

5. Carefully place the lavatory into the cutout. Align the lavatory in the cutout, then push downward at intervals around the edge. Wipe off excess sealant immediately with a damp cloth or sponge.

6. Complete all supply and waste connections, following the manufacturer's instructions. Turn on the main water supply and open the shut-off valves. Check all connections for leaks. A slight tightening of about 1/4 turn will normally stop any leaks.

CARE AND CLEANING


For everyday cleaning, use dish washing soap and water.

PARTS

Parts Policy...In order to avoid unnecessary delay or uncertainty in the satisfaction of warranty claims, buyers are advised to return alleged defective parts to the place of purchase. Sellers are authorized to address and resolve all warranty claims on fixtures directly with buyers.

Your limited warranty is packed in with your lavatory.

ROUGH-IN INFORMATION

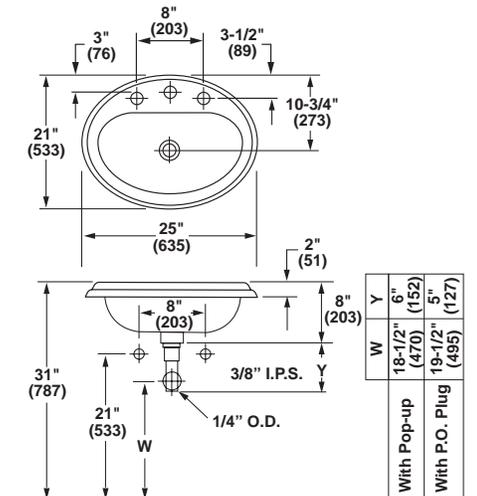

FAUCETS ARE NOT INCLUDED. ALL FIXTURE DIMENSIONS ARE NOMINAL AND MAY VARY WITHIN THE RANGE OF TOLERANCES ESTABLISHED BY ANSI STANDARDS A112.19.4 ALL MEASUREMENTS SHOWN ARE SUBJECT TO CHANGE OR CANCELLATION

LIMITED WARRANTY

JACUZZI WHIRLPOOL BATH (“Jacuzzi Whirlpool Bath”, “we”, “us”, “our”), warrants to the original consumer/purchaser for the applicable warranty period set forth below, that the products we sell are free from defects in material and workmanship, except as otherwise indicated below.

PRODUCTS	WARRANTY PERIOD (commences upon date originally installed for its intended purpose)
• All cast iron sink products with porcelain enamel finish.	Limited lifetime vessel warranty to the original consumer/purchaser only. The porcelain enamel finish is warranted for one (1) year.
• 1.6 gpf/6 ltr. china toilets.	Five (5) years.
• All other china products and kitchen sink accessories.	Two (2) years.
• All toilet seats.	One (1) year.

ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ON THESE PRODUCTS IS LIMITED IN DURATION TO THE WARRANTY PERIOD SPECIFIED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU.

This limited warranty does not cover:

- (a) damage to any products based on or resulting from improper installation or repair, misuse or abuse (including but not limited to excessive operating conditions), or alteration or adjustment other than in conformity with our specifications or instructions, whether performed by a contractor, service company or yourself;
- (b) damages resulting from failure to reasonably clean, care for or maintain a product in accordance with our instructions/recommendations; or,
- (c) any products we sell that have been moved or removed from their original installation site.

If you believe that a product fails to meet the above limited warranty, you should notify us in writing prior to expiration of the applicable warranty period set forth above at the following address: **Jacuzzi Whirlpool Bath, PO Box 702168, Dallas, TX 75370-2168**. Notification should include a description of the product, model number and how the product fails to meet the above warranty. Upon receipt of a written claim under this limited warranty and evidence of the date of purchase or installation, and after inspection by an authorized Jacuzzi Whirlpool Bath representative, at our option and in our sole discretion, we will either repair or replace the product with a Jacuzzi Whirlpool Bath product of the same or similar type and size; provided, however, that we will not pay any costs (labor or otherwise) associated with either removing a previously installed product; installing a replacement product; or transportation or return of a product.

JACUZZI WHIRLPOOL BATH WILL NOT BE LIABLE FOR ANY OTHER LOSS OR EXPENSE(S) NOT SPECIFICALLY DESCRIBED ABOVE, AND DISCLAIMS ANY LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES.

SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE EXCLUSION MAY NOT APPLY TO YOU.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.