Signature™ Collection Corner Drop-In Soaker And Whirlpool Bathtubs

Letter	Description	SOAKER MODEL J5D6060B	WHIRLPOOL MODEL J5D6060W
-	Drain/Motor Location	Center Drain	Center Drain & LH / RH Motor
-	Cutout	See Below	See Below
-	Total Weight	1042 lbs (473 kg)	1057 lbs (479 kg)
-	Floor Loading	41.7 lb/f² (204 kg/m²)	42.3 lb/f² (206 kg/m²)
-	Operating Gallons (Max)	86 U.S. gallons (326 liters)	86 U.S. gallons (326 liters)
-	Product Weight	76 lbs (34 kg)	91 lbs (41 kg)
-	Soaking Depth	15" (381 mm)	15" (381 mm)
L	Outer Length	60" (1524 mm)	60" (1524 mm)
W	Outer Width	60" (1524 mm)	60" (1524 mm)
H	Overall Height	22" (558 mm)	22" (558 mm)
A	Overflow Height	17.38" (378 mm)	17.38" (378 mm)
B	Long Edge to Drain Center	14.50" (368 mm)	14.50" (368 mm)
C	Deck Edge to Drain Center	33.25" (845 mm)	33.25" (845 mm)
D	Drain Shoe Length	17.50" (441 mm)	17.50" (441 mm)
E	Deck Height	2" (51 mm)	2" (51 mm)
F	Deck Width	3" (76 mm)	3" (76 mm)
G	Service Access Dimensions	12" x 18" (305 mm x 457 mm)	12" x 18" (305 mm x 457 mm)
I	Floor Cutout for Drain	19" x 4" (483 mm x 102 mm)	19" x 4" (483 mm x 102 mm)
J	Interior Dimensions (bottom of bath) J(L) x J(W)	48" x 39" (1219 mm x 990 mm)	48" x 39" (1219 mm x 990 mm)

WiHIRLPOOL MODELS

Each component requires a seperate, dedicated GFCI protected circuit

Model with components	GFCI Outlet (60Hz)
Motor/Pump	120V 15A
Heater (if available)	120V 15A

KEY DIMENSIONS* [NOTE: The overall dimensions are nominal with a tolerance of +0 and -.25" (6mm).]

Left Hand unit Illustrated

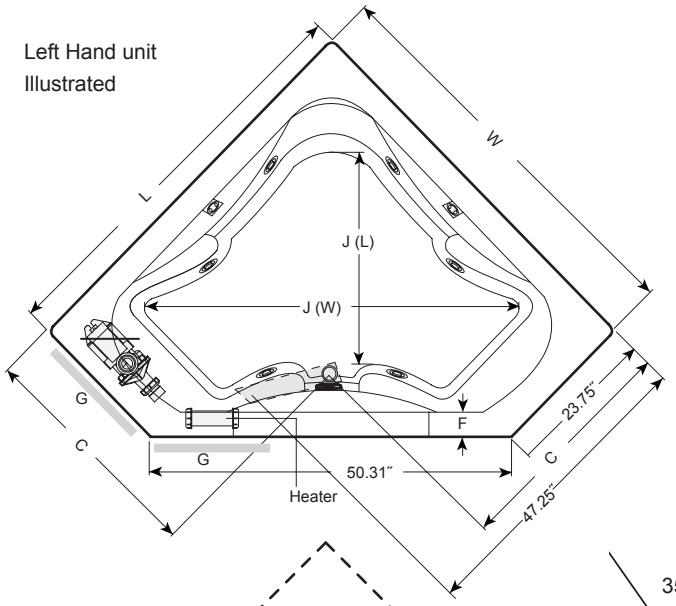

NOTE

When ordering integral 3-tile flange (J5T), flange height on 3-tile flange is 1.25" (32mm) from deck.

All Models

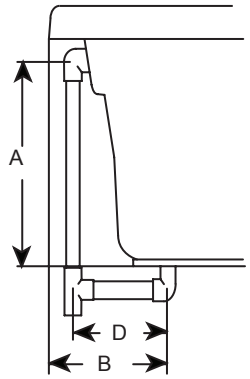

DRAIN/OVERFLOW

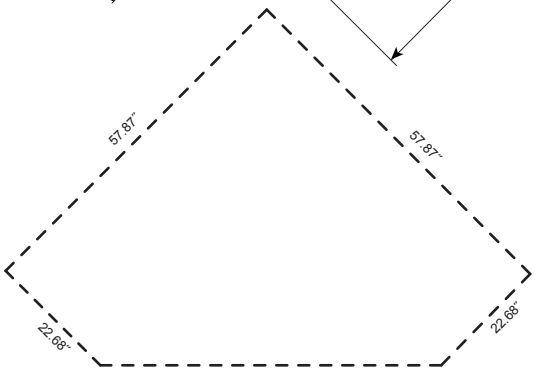

Template Cutout



BACKREST ANGLE

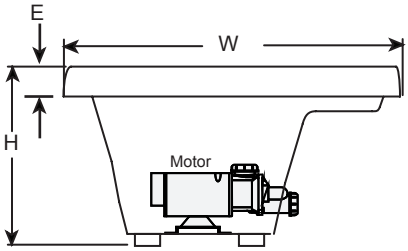

END VIEW

NOTE: Drawings not to scale.

©2017 Jacuzzi Luxury Bath • For additional information call Customer Service 800-288-4002 • www.jacuzzi.com/baths/support/specs-and-manuals/