# Mio 6636 Whirlpool

Product Codes beginning with: MIO6636WCR

Also applies to products sold under part numbers: HR10, HY15, HY20, HY25, HY30, HY35, HY40, HY45

(Jac	VZZĬ. 丿

#### TECHNICAL SPECIFICATIONS


	English	Metric	
Outer Dimensions	66" L x 36" W x 25" H	1676 mm L x 915 mm W x 635 mm H	
Interior Dimensions (bottom of bath) L x W (Mid) x W (End)	40" L x 21 1/8" W x 21 1/8" W	1035 mm L x 537 mm W x 537 mm W	
Drain/Pump Configuration	Center drain/Right end pump	Center drain/Right end pump	
Bath Weight (empty)	128 lbs	58 kg	
Total Weight/Floor Loading	961 lbs 58.2 lbs/ft <sup>2</sup>	436 kg 284 kg/m <sup>2</sup>	
Operating Gallonage (min-max)	48 (min) 70 (max) U.S. Gals	182 (min) 265 (max) L	
Electrical Specifications	Each component requires a separate, dedicated GCFI protected circuit		
Motor/Pump	120V 20A 60HZ		
Heater	120V 15A 60HZ		

### FEATURES, UPGRADES & ACCESSORIES


Material Type: High-Gloss Acrylic Install Type: Drop-in or Undermount Available Colors: White (W), Almond (A), Oyster (Y), Black (B) Cut-out Template: HQ96000 Standard (Included) Features: 8 jets, In-line Heater, Chromatherapy lighting Available Control Systems: J4 Luxury Control Panel (standard) J5 Luxury LCD Control Panel

#### Available Upgrades: Whisper Quiet Technology, Illumatherapy Lighting Available Accessories: DA34 Rotary Drain Kit PVC (specify metal finish) GU44 TheraPro Jet Trim Kit (specify metal finish) GU45 AccuPro Jet Trim Kit (specify metal finish) 827: Chrome, 826: Brushed Nickel, 845: Oil Rubbed Bronze \*Note: GU44 (Chrome) is standard on Illumatherapy jets. C263 Curved Pillow (specify color) 959: White, 958: Almond, 969: Oyster GQ88 Light Chromatherapy Add-on Kit

## **KEY DIMENSIONS**

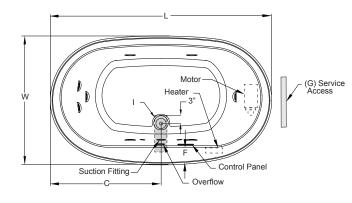


\*Deck width reflects only area indicated on detail.



NOTE: Graphics May Not be to Scale

© 2010 Jacuzzi Luxury Bath • For additional information call Customer Service 800-288-4002 • www.jacuzzi.com/technicalspecs Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work. PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

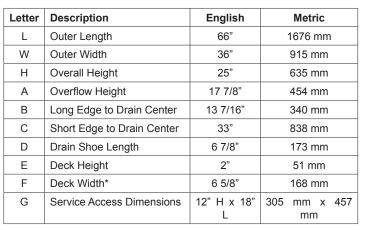

(Motor)

End View

пЩ

W (Heater)



Drain/Overflow Note: Drain installation is non-standard. Vertical overflow connection requires offset.